

TALKIE BOX 3

WALKIE TALKIE, RADIO & TELEPHONE SOUNDS DESIGNER

USER GUIDE



CONTENTS

1. INTRODUCTION
2. SETUP INSTRUCTIONS
3. BROWSER
4. PROCESSING SECTIONS
 - 4.1. RADIO
 - 4.2. TELEPHONE
 - 4.2.1 DIAL PAD / MORSE
 - 4.3. NOISE ENGINE / VOICE LAB
 - 4.4. SAMPLER
5. FINE TUNING
6. MASTER RACK
7. RECORDING
 - 7.1 BATCH PROCESSING
8. PRESET MANAGER
9. MIDI
10. KEYBOARD SHORTCUTS
11. AUDIO SETTINGS
12. SYSTEM REQUIREMENTS

1 | INTRODUCTION

Talkie Box is a 64 Bits standalone software developed for audio postproduction purposes, emulating Walkie Talkie, Radio and Telephone voice effects, including background noise design section. However, fell free to experiment anything you want, you will find some interesting and unexpected settings combinations.

2 | SETUP INSTRUCTIONS


MAC:

Open DMG. Drag & drop Talkie Box 3 to your applications folder. Double-click Talkie Box 3.app.

WINDOWS:

Drag & drop Talkie Box 3 to your programs folder. Double-click Talkie Box 3.exe

3 | BROWSER

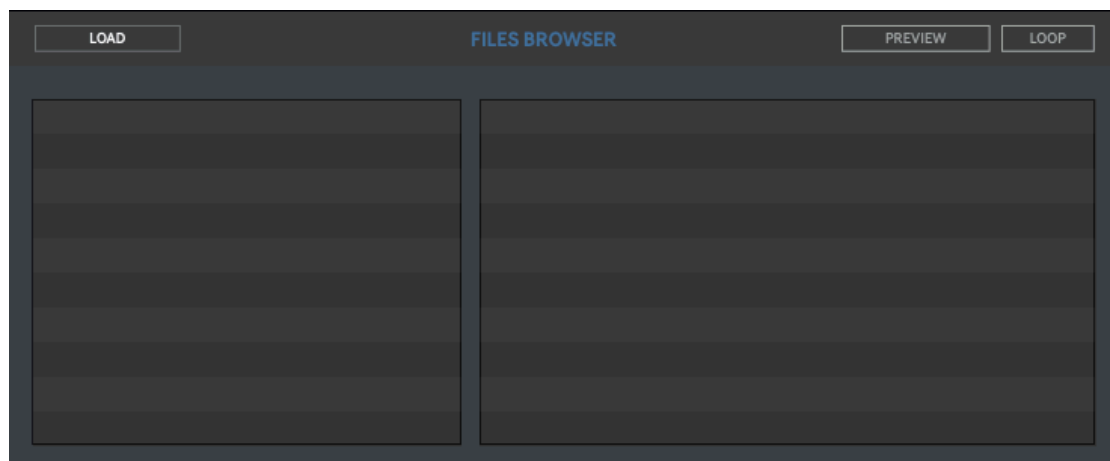

Talkie Box 3 allows processing Wav, Aiff and Mp3 audio files.

- **Load:** Select the source files folder. Drag&drop any folder from your computer within Folders section.
- **Loop:** Activate/deactivate looped playback mode.
- **Preview:** Preview audio files (not processed)
- ← (Keyboard): Stop audio preview
- → (Keyboard): Preview audio file. Double-click on an audio file name for preview.

4 | PROCESSING SECTIONS

Talkie Box 3 includes 4 audio processing sections:

- **Radio**
- **Telephone**
- **Noise Engine & Voice Lab**
- **Sampler**

4.1 | RADIO



Radio section emulates Radio & Walkie Talkie voice effects. Audio input is processed through several pre-designed filters (backend) and includes some additional filters to design your sounds.

- **High Pass & Low Pass Filters** [20-20.000 Hz].
- **Bandstop Filter** [300-16.000 Hz].
- **Resonance Filter** [300-16.000 Hz] [Level +3/+15 dB]
- **Low/High Distortion Level.**


4.2 | TELEPHONE



Telephone section emulates Telephone voice effects.

- **Bandwidth.** Limit your audio signal bandwidth between 300Hz and 3.5kHz.
- **Resonance Filter.** Select your central frequency [400-2.500 Hz] [Level +3/+10 dB].
- **Bandpass Filter.** Select your central filter frequency [20-20.000 Hz] & Size/Q factor [1-4].


4.2.1 | DIAL PAD

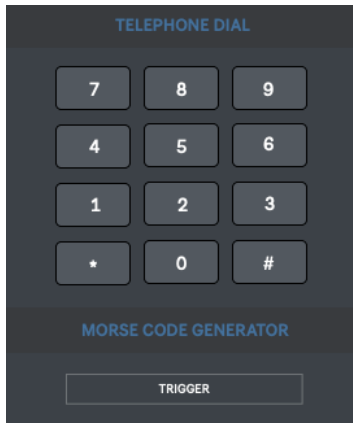

The Dial window includes 2 sections:

- **Telephone dial pad.** Generate real telephone dialling tones. Allows using numeric keypad to trigger the telephone keys.
- **Morse:** This section generates standard Morse Code test tones. Click TRIGGER to generate tones. (Shortcut “m”)

4.3. NOISE ENGINE

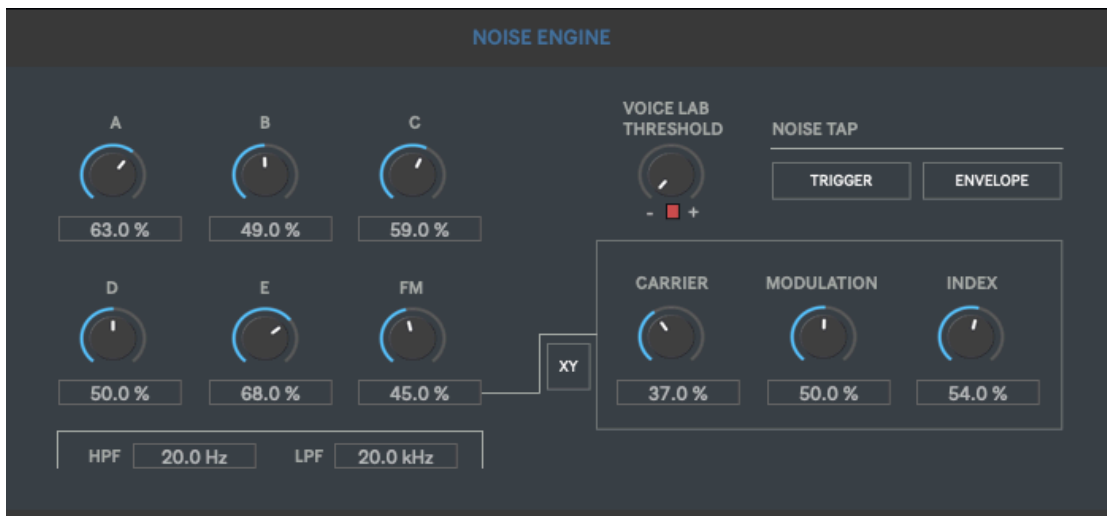

This section allows designing your own background noise and radio interferences. It features up to 6 different predesigned noise signals that you can combine to create a realistic radio background noise. Includes HPF & LPF.

- **FM Noise:** Noise signal based on FM Synthesis. It allows you to control 3 different parameters, Carrier, Modulation & Index. X/Y Pad controls 2 modulation/index parameters.
- **Noise Tap:** Allows triggering the designed Noise signal as if it were a sampler.

Once the desired noise signal has been created, just mute the Noise Engine channel at mixer section and trigger the generated noise signal using “**Trigger**” button (Shortcut “t”).

Envelope allows you to design an amplitude envelope for the noise tap signal. Envelope duration 1000ms.

- **Voice Lab:** This section allows adding noise to the output signal. The Input is convolved through the designed noise signal; it generates noisy sounds that can be added to the audio signal to make it more realistic. The resulting output signal will retain some, or most of the original frequency content of your input, while its energy (or spectral envelope) will be largely determined by noise generated signal's energy.

Voice Lab Threshold: Allows setting up at which input level is activated the voice lab output. For instance, you can set it to allow voice lab output only when the input is high.

4.4 | SAMPLER



Talkie Box 3 includes 6 pre-recorded Radio sounds that you can trigger. Click on any **Sample Pad** to trigger the sounds (Pads 1 to 6).

- **PAD 7:** Allows loading any sounds from your computer into the sampler.
- **Pitch Shifting:** Change the pitch of the sampler output. [+/- 24 semitones]

Shortcuts:

- **Pad 1 - Q**
- **Pad 2 - W**
- **Pad 3 - E**
- **Pad 4 - A**
- **Pad 5 - S**
- **Pad 6 - D**
- **Pad 7 - Z**

5 | FINE TUNING (AFC)


Fine Tuning control allows you to emulate the fine tuning (AFC) effect when looking for a specific radio station or trying to set up the right radio frequency. It can be used to mix Radio or Telephone sections against the Noise Engine & Voice Lab sections. This is useful for creating a more realistic fine-tuning effect or emulating constant audio quality change from the received signal. It acts as a crossover between the selected sections outputs.

- **Fine Tuning selector:** Chose to which crossover side you assign each section output. OFF, 1 & 2.

6 | MASTER RACK

Master rack section includes a 3-band Parametric EQ, HPF, LPF, Sampling Rate/Bit Depth Distortion and 4 vst/au plugins. Drag & Drop plugins from your computer to plugin slots.

7 | RECORDING

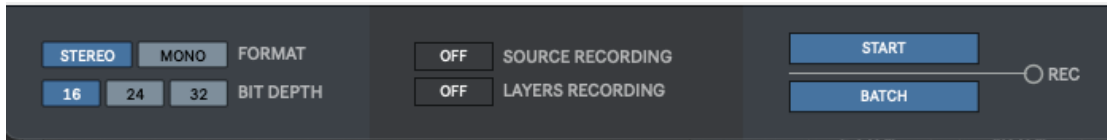

Talkie Box 3 allows recording audio output into Wav & Aiff file formats. Up to 192kHz depending on your soundcard. Mono & Stereo. 8, 16 & 24 Bits.

Press “**Start**” to start recording. A pop-up window will ask you where do you want to save the files. As soon as you set the destination folder, the recording will start automatically.

- **Source Recording:** Activate it to record an additional file including only the source input. This is useful when using a microphone to create radio or telephone sound effects as you save an audio file containing the input signal that you can later load again within Talkie Box 3 to apply some adjustments/corrections/variations before the final recording using the same input source used before.
- **Layers Recording:** Activate it to save each section output also on an individual audio file. It can create audio files for Radio, Telephone, Noise Engine and Voice Lab sections. It creates audio files only for the used sections. The different sections are captured after gain stage and before master rack (not included). Fine-tuning section not included.

7.1 | BATCH PROCESSING

This section allows processing through Talkie Box 3 a large number of files within one-click. A very useful option if you need to process a batch of files using the same preset. It can save you a lot of time in the studio.

Press “**Batch**” to start batch processing. A pop-up window will ask you where do you want to save the files. As soon as you set the destination folder, the batch processing will start automatically.

The processed files will have the following name structure: **Your File Name_processed**

Source and layers recording is disabled when using Batch processing.

8 | PRESET MANAGER

Save and recall the whole session data.

- **Save:** Save a preset
- **Load:** Load a preset
- **Folder:** Load a presets folder within the scroll-down menu for faster experience when working with different presets.
- **R:** Reset Talkie Box 3 to default.

9 | MIDI MAPPING

You can control several controls using your midi device.

At Audio Settings window click on **“Setup”** to change to midi mapping mode. To assign midi controls just select which control you want to assign and move the desired control within your midi device. To remove a midi assign just activate again midi mapping mode, right-click on the selected control you want to remove midi assign and select **“Delete Mapping”**.

Press **“ESC”** to close midi mapping mode.

10 | KEYBOARD SHORTCUTS

For faster and more user-friendly experience.

Sampler:

- Pad 1: Q
- Pad 2: W
- Pad 3: E
- Pad 4: A
- Pad 5: S
- Pad 6: D
- Pad 7: Z

Noise Tap Trigger: T

Morse Trigger: M

Recording:

- Open Recording Section: CTRL/CMD + R
- Start Recording: S
- Stop Recording: F

Audio Settings: CTRL/CMD + A

Browser Section:

- ← (Keyboard): Stop audio preview
- → (Keyboard): Preview audio file. Double-click on an audio file name for preview.

11 | AUDIO SETTINGS

In this section you can select your audio settings. Set up your own output configuration depending your soundcard and needs at any time.

If you have audio issues (clicks/distortion/latency) try changing IO Vector Size and Signal Vector Size to lower values.

12 | SYSTEM REQUIREMENTS

Mac

Mac Intel machine running OS X 10.11.6 or later. 64 Bits. 4GB Ram Recommended

Apple M1 ARM machine running OS 11.0 or later. 64 Bits. 4GB Ram Recommended

Windows

Windows 8 or later, multicore processor. 64 Bits. 4GB Ram Recommended

THANKS FOR YOUR SUPPORT!

Technical support at
support@digitalbrain-instruments.com

DIGITAL BRAIN INSTRUMENTS | <http://www.digitalbrain-instruments.com>
Don't forget to subscribe to our newsletter for the latest news and updates.